

ENDEAVOUR 1.I MOVE



magicblack matt



white glossy



magicblack matt

MOTOR: Impulse 2.0, 36 V / 250 W
with shift sensor technology

DISPLAY: Impulse Compact LCD
with control panel and walk assist

BATTERY: Impulse Li-Ion 36 V
17 Ah (603 Wh), 11 Ah (396 Wh)

RANGE: up to 205 km

CHARGER: Impulse, 3A

SPECIFICATIONS

SHIFTING SYSTEM: Shimano Altus, 8-speed
SHIFTER: Shimano Altus M310
CRANKSET: Concept
SPROCKET: Shimano HG31
GEAR RATIO: front: 38, rear: 11-32
DRIVETRAIN: KMC X8.93
BRAKES: Tektro T285, hydraulic disc brake
BRAKE ROTORS: front: 180 mm, rear: 160 mm

FRONT-LIGHT: Axa Compactline, LED, 35 Lux
REAR-LIGHT: Axa BlueLine, LED with stand light
FRAME: Impulse V2, aluminium
FORK: SR Suntour NEX, adjustable
STEM: Concept SL, adjustable
HANDLEBAR: Concept Riser, Concept Tour
GRIPS: Herrmans Click
SADDLE: Concept Trekking
SEATPOST: Concept SL
PEDALS: Sport aluminum, with reflector

RIMS: Concept, with eyelets
HUBS: front: Shimano DH-3D32, hub dynamo, QR
rear: Concept SL, QR
TYRES: Schwalbe Energizer Life, 40-622
FENDER: plastic, with edge protector
CARRIER: Tour, aluminium
KICKSTAND: rear stand
PERMISSIBLE
TOTAL WEIGHT: 130 kg

ITEM NUMBERS


AD ESAURIMENTO

Freewheel


Item	Size	Order no.			
		magicblack matt /17 Ah	magicblack matt /11 Ah	white glossy /17 Ah	white glossy /11 Ah
28" Diamond	S/46	633 622 349	633 620 349		
28" Diamond	M/50	633 622 350	633 620 350		
28" Diamond	L/55	633 622 351	633 620 351		
28" Diamond	XL/60	633 622 352	633 620 352		
28" Trapez	S/46	633 622 353	633 620 353	633 622 363	633 620 363
28" Trapez	M/50	633 622 354	633 620 354	633 622 364	633 620 364
28" Trapez	L/55	633 622 355	633 620 355	633 622 365	633 620 365
28" Comfort	S/46	633 622 357	633 620 357	633 622 367	633 620 367
28" Comfort	M/50	633 622 358	633 620 358	633 622 368	633 620 368
28" Comfort	L/55	633 622 359	633 620 359	633 622 369	633 620 369

Geometries Impulse V2, aluminium


Diamond

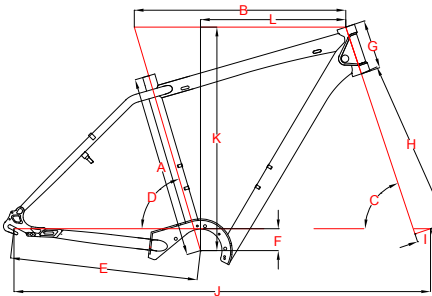

Trapez

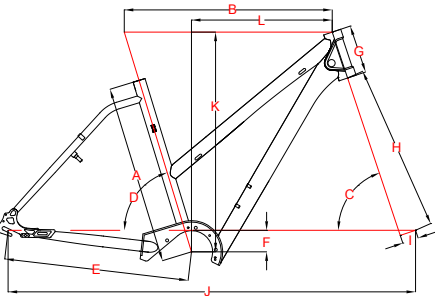

Comfort

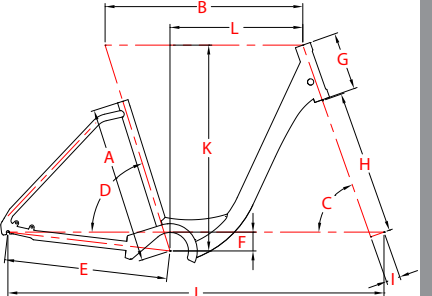

	Diamond		Trapez		Comfort	
Wheel diameter	28"	28"	28"	28"	28"	28"
A Seat tube length (mm)	500	550	600	460	500	550
B Top tube length (mm)	580	595	610	570	580	595
C Steering angle (°)	71,5	71,5	71,5	71	71,5	70,5
D Seat angle (°)	73,5	73	73	73,5	73,5	73
E Chain stay length (mm)	515	515	515	515	515	520
F Bottom bracket drop (mm)	60	55	55	60	60	60
G Head tube length (mm)	135	170	220	135	135	170
H Fork installation height (mm)	460	460	460	460	460	460
I Forward fork curve (mm)	45	45	45	45	45	45
J Wheelbase (mm)	1142	1155	1171	1138	1143	1155
K Stack (mm)	619	647	694	617	619	647
L Reach (mm)	397	397	398	387	397	401
Standover/step-through height	795	845	895	680	680	395
Handlebar width (mm)	640	660	660	640	640	640
Stem length (mm)	90	110	110	90	90	90
Crank arm length (mm)	170	170	170	170	170	170

