

IMAGE 5.S MOVE



MOTOR: Shimano Steps E6100 series, 36V / 250 W

DISPLAY: Shimano SC-E6100, LCD Display

BATTERY: Integrated Li-Ion 36V / 15 Ah (540 Wh)

RANGE: up to 180 km

CHARGER: Charger, 4A

SPECIFICATIONS

SHIFTING SYSTEM:	Shimano Nexus, 8-speed	FRONT-LIGHT:	Herrmans H-Black MR8, LED	RIMS:	Rodi Blackrock, with eyelets
SHIFTER:	Shimano Nexus	REAR-LIGHT:	AXA BlueLine, LED	HUBS:	front: Shimano Acera M3050
CRANKSET:	Concept	FRAME:	Integrale 0.5 Belt, aluminium		rear: Shimano Nexus, 8-speed
SPROCKET:	Shimano	FORK:	SR Suntour NEX E25, lockout	TYRES:	Schwalbe Energizer Life, 47-622
GEAR RATIO:	front: 38, rear: 18	STEM:	Concept EX, adjustable	FENDER:	plastic, with edge protector
DRIVETRAIN:	KMC Z510-EPT	HANDLEBAR:	Concept EX City Riser, Concept EX Ergo Riser	CARRIER:	Racktime system
BRAKES:	Shimano M315, hydraulic disc brake	GRIPS:	Herrmans Click	KICKSTAND:	rear stand, adjustable
BRAKE ROTORS:	front: 180 mm, rear: 160 mm	SADDLE:	Selle Royal Nuvola	PERMISSIBLE	
		SEATPOST:	Patent MCU, suspension	TOTAL WEIGHT:	130 kg
		PEDALS:	Urban, with anti slip protection and reflector		

ITEM NUMBERS



Freewheel

Item	Size	Order no.	
		diamondblack matt /15 Ah	magicblack/pecan-brown matt /15 Ah
28" Diamond	S/43	633 525 490	
28" Diamond	M/48	633 525 491	
28" Wave	S/43		633 525 515
28" Wave	M/48		633 525 516

Geometries Integrale 0.5 Belt, aluminium

Diamond

Wave

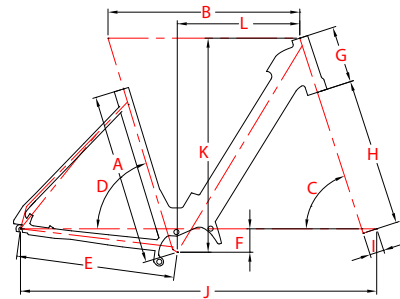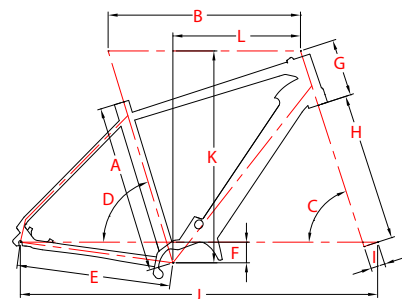

	Diamond				Wave			
Wheel diameter	28"	28"	28"	28"	28"	28"	28"	28"
A Seat tube length (mm)	430	480	530	580	430	480	530	580
B Top tube length (mm)	592	597	606	613	588,2	597,1	606	614,9
C Steering angle (°)	72	72	72	72	72	72	72	72
D Seat angle (°)	73	73	73	73	73	73	73	73
E Chain stay length (mm)	485	485	485	485	485	485	485	485
F Bottom bracket drop (mm)	65	65	65	65	65	65	65	65
G Head tube length (mm)	160	170	180	190	160	170	180	190
H Fork installation height (mm)	469	468	468	468	468	468	468	468
I Forward fork curve (mm)	45	45	45	45	45	45	45	45
J Wheelbase (mm)	1111	1117	1126	1133	1107,5	1116,6	1125,7	1135
K Stack (mm)	649	658	667	677	648,4	657,9	667,4	676,9
L Reach (mm)	393	396	402	406	390	396	402	408
Standover/step-through height	814	840	866	891	629	626	625	623
Handlebar width (mm)	690	690	690	690	640	640	640	640
Stem length (mm)	80	80	80	100	80	80	80	100
Crank arm length (mm)	170	170	170	170	170	170	170	170

